
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. ENGLAND - Building Regulations. Ridge ~10.1 m, below 11 m. Floors, steels, stairs, roofs, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

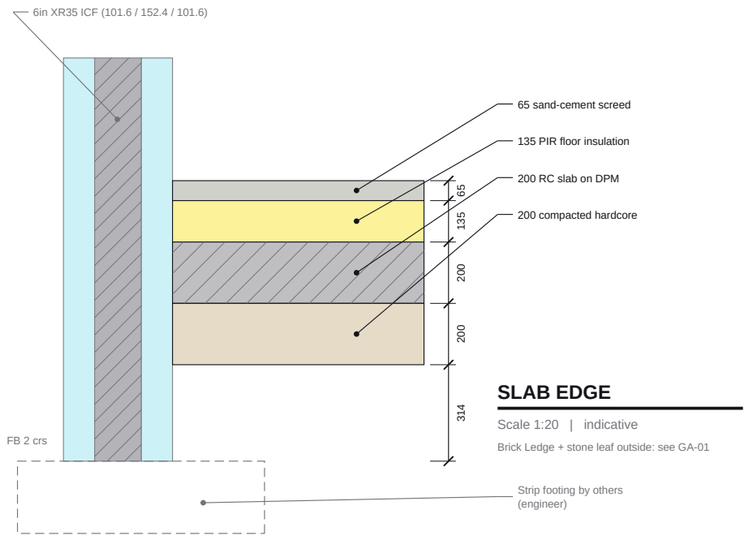


SLAB EDGE

Scale 1:20 | indicative

Brick Ledge + stone leaf outside: see GA-01




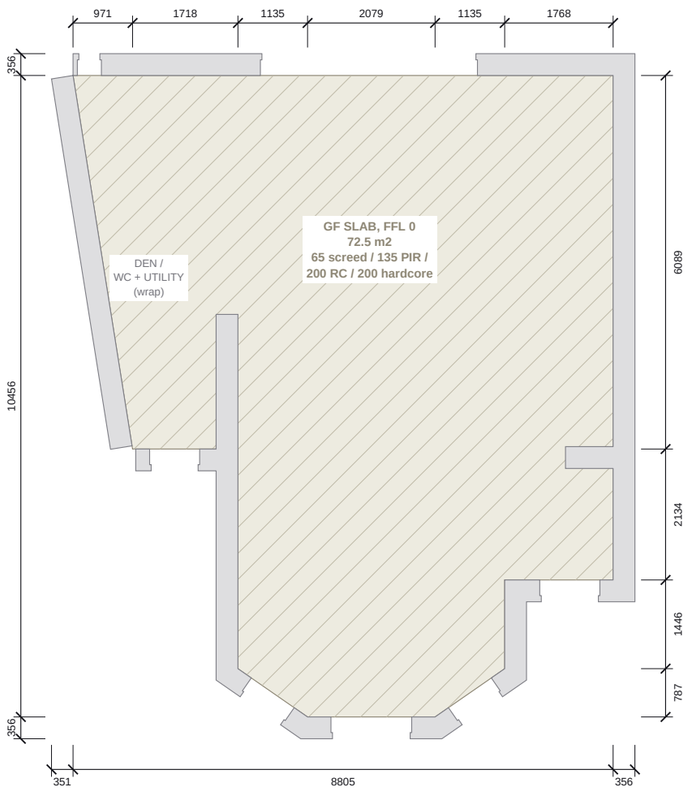

GROUND FLOOR SLAB

Scale 1:100 @ A3 | ICF cut at +1,000

0 1 2 3 4 5m

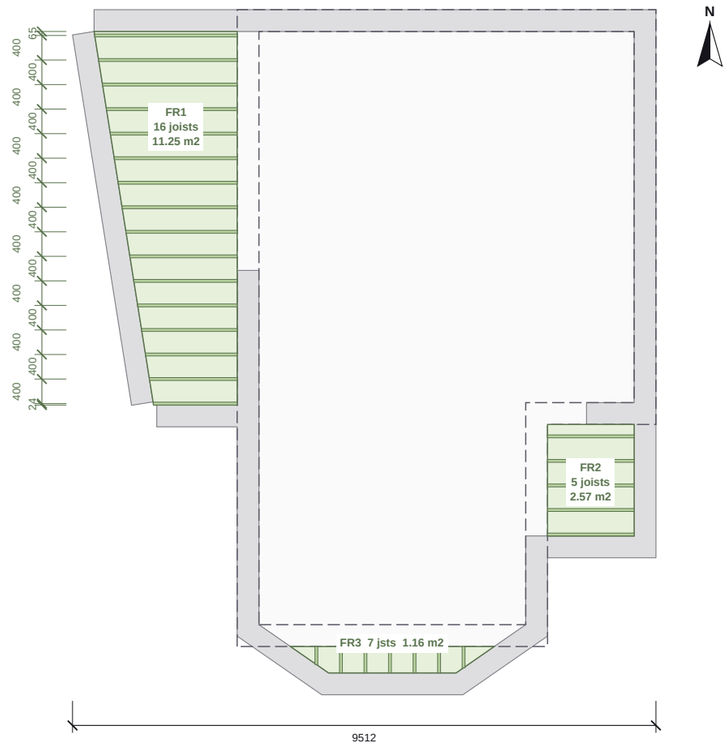

GF FLAT ROOFS FR1-FR3

Scale 1:100 @ A3 | joists +2,730-2,950, ICF parapets cut at +3,000

GROUND FLOOR SCHEDULES

GF SLAB BUILD-UP (INSIDE THE ICF)

Layer (top down)	m2
65 sand-cement screed	4.72
135 PIR floor insulation	9.79
200 RC ground-bearing slab (on DPM)	14.51
200 compacted hardcore	14.51

Areas from the model (inner face of the ICF). Indicative - engineer.

GF FLAT ROOFS (47X220 C24 @400)

Roof	Over	Joists	Length	m2
FR1	GF wrap (den / WC + utility)	16	1,366-2,322	11.25
FR2	porch	5	1,412	2.57
FR3	bay	7	294-431	1.16
	Total	**28**		**14.98**

Each roof: 18 OSB3 deck, 120 PIR (tapered, avg), single-ply membrane + upstands to the ICF parapet.

FLAT ROOF MATERIALS

Item	Qty
47x220 C24 flat roof joist	39.4 m
18 OSB3 deck	14.98 m2
120 PIR tapered (avg)	14.98 m2
Single-ply membrane + upstands	14.98 m2 + upst.

NOTES

1. GF slab (INDICATIVE, engineer to design): 65 sand-cement screed, 135 PIR floor insulation, 200 RC ground-bearing slab (on DPM), 200 compacted hardcore; inside the ICF on the 2-course 6in XR35 foundation (FB -914.4 to 0) on a strip footing by others. Slab 72.5 m2. Perimeter insulation upstand, DPM laps, radon / gas measures and the slab design to the engineer.
2. Nudura Brick Ledge on the top FB course for the natural stone outer leaf (stone, ties and lintels by others). Internal load-bearing ICF walls (main left wall line x 274, wing front y 3,893) on the FB foundation.
3. GF FLAT ROOFS FR1 (wrap: den / WC + utility), FR2 (porch), FR3 (bay): 47x220 C24 joists @400 (top +2,950), 18 OSB3, 120 PIR tapered to falls, single-ply membrane (top +3,093) turned up the ICF parapets (7 courses, top +3,200). Joists hung off the ICF on face-fix hangers / ledgers - INDICATIVE, by others; outlets, falls and upstand details to the roofer.
4. Levels above GF FFL 0 (mm). Read with the ICF GA drawings; first floor on ES26-065-FL-02.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Clifton College Garage Site, Clifton Park Road, Bristol

DRAWING TITLE

GROUND FLOOR SLAB AND FLAT ROOFS

Ground-bearing slab build-up, GF flat roofs FR1-FR3

SCALE	SIZE	DATE
1:100 / 1:20	A3	02.11.26
DRAWN: TS	CHECKED	APPROVED

STATUS	DRAWING No.	REV
QUOTATION	ES26-065-FL-01	-

Do not scale. All dimensions in mm. Check all dimensions on site.