
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. ENGLAND - Building Regulations. Ridge ~10.1 m, below 11 m. Floors, steels, stairs, roofs, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

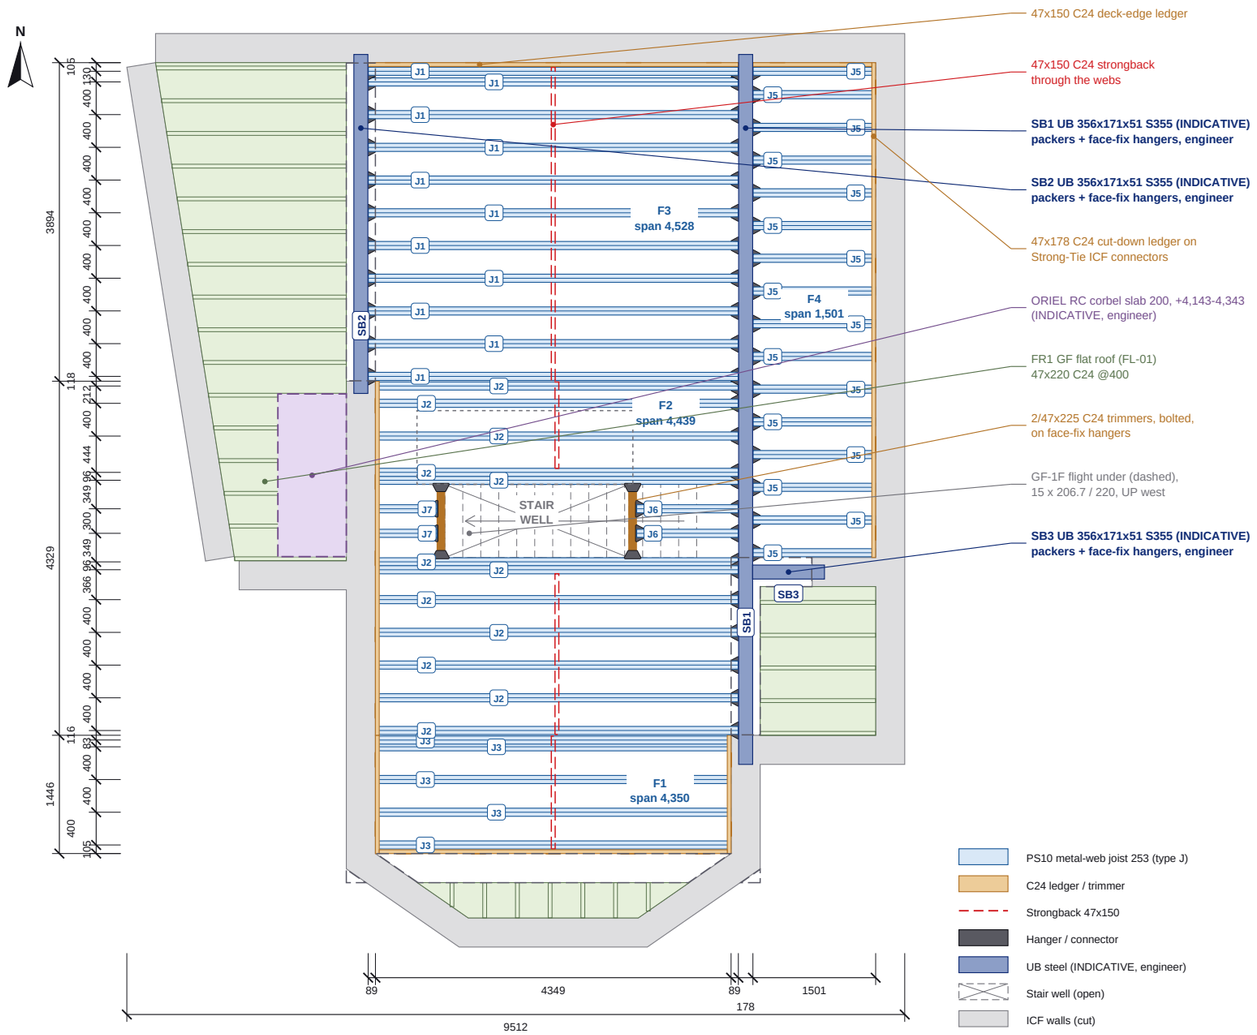


PS10 metal-web joist 253 (type J)
C24 ledger / trimmer
Strongback 47x150
Hanger / connector
UB steel (INDICATIVE, engineer)
Stair well (open)
ICF walls (cut)
ICF walls over (where different)
GF flat roof (FL-01)
Oriel RC corbel (INDICATIVE)

FIRST FLOOR JOIST LAYOUT

Scale 1:75 @ A3 | Plan on the joists, deck omitted; ICF cut at +2,950

0 1 2 3 4 5m

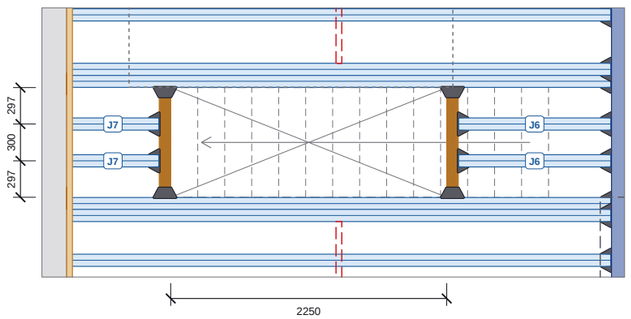

STAIR WELL FRAMING - ENLARGED

Scale 1:50 | trimmers, trimming pairs, trimmed joists

FIRST FLOOR SCHEDULES

JOIST SCHEDULE (PS10 253 DEEP, @400)

Type	O/A	Bottom	Bearing	Bays	Qty
J1	4,522	4,522	steel packer both ends	F3	11
J2	4,433	4,386	ICF ledger / steel packer (incl. 4 dbl)	F2	12
J3	4,344	4,250	ICF ledger both ends	F1	5
J5	1,495	1,448	steel packer / ICF ledger	F4	16
J6	1,240	1,240	trimmed: hung off trimmer	F2	2
J7	748	701	trimmed: hung off trimmer	F2	2
	Total				**48**

O/A = top chord overall, Bottom = bottom chord. Includes 4 No. in doubled (bolted) trimming pairs. Types J1-J8 common to both floors.

LEDGERS, STRONGBACKS, TRIMMERS (C24)

Item	Length	Qty	Run m
2 No. 47x225 trimmer, bolted	894	2	1.8
47x150 deck-edge ledger	1,454-4,528	3	10.2
47x150 strongback	1,056-3,827	4	8.2
47x178 ledger cut-down	1,446-6,050	4	13.3

METALWORK AND DECK

Item	Qty
Top-chord restraint clip (galv)	40
Strong-Tie ICFVL-CW + ICFLC ICF connector	27
Face-fix hanger on timber packer in UB web	52
Face-fix trimmer hanger	4
Face-fix joist hanger off trimmer	4
22 Egger Protect P5 T&G board	62 (50.2 m2)

1F STEELS (INDICATIVE - ENGINEER)

Mark	Section	Line	Length	kg
SB1	UB 356x171x51 S355	y 4,979	8,679	443
SB2	UB 356x171x51 S355	y 274	4,144	211
SB3	UB 356x171x51 S355	x 3,893	879	45
	Total (indicative)			**699**

NOTES

1. First floor FFL +3,100: 48 No. PS10 metal-web joists 253 deep (97x47 flanges) @400 E-W in bays F1-F4. ICF ends TOP-HUNG on 47x178 C24 cut-down ledgers (47x225 ripped) on cast-in Strong-Tie ICFVL-CW + ICFLC connectors; steel ends on face-fix hangers to timber packers bolted in the UB web.
2. Ledger top +3,031, joist top +3,078, 22 Egger Protect P5 T&G deck. 47x150 C24 strongbacks through the webs at mid-span, 47x150 deck-edge ledgers, galv restraint clips at every top-hung bearing.
3. STAIR WELL 2,250 x 894: doubled trimming joists (bolted pairs) each side, 2/47x225 C24 trimmers on face-fix hangers, trimmed joists hung off the trimmers. GF-1F flight 15 x 206.7 / 220 (indicative, joiner; drawn stair = RFI).
4. STEELS SB1-SB3 UB 356x171x51 S355 INDICATIVE (699 kg, top +3,200.4): the structural engineer designs sections, bearings, padstones, pockets in the ICF and connections; timber packers + padstones are in the model (own group) and not scheduled here.
5. ORIEL: RC corbel slab 200 off the main left wall at +4,143-4,343 carries the oriel ICF (INDICATIVE, engineer). GF flat roofs FR1-FR3 at the same level - see FL-01. Joist supplier to design and confirm; pricing only.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Clifton College Garage Site, Clifton Park Road, Bristol

DRAWING TITLE

FIRST FLOOR STRUCTURE

PS10 joists, ledgers, hangers, strongbacks, stair well trimming, SB1-SB3, oriel corbel

SCALE	SIZE	DATE
AS SHOWN	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-065-FL-02	-

Do not scale. All dimensions in mm. Check all dimensions on site.