
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. ENGLAND - Building Regulations. Ridge ~10.1 m, below 11 m. Floors, steels, stairs, roofs, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

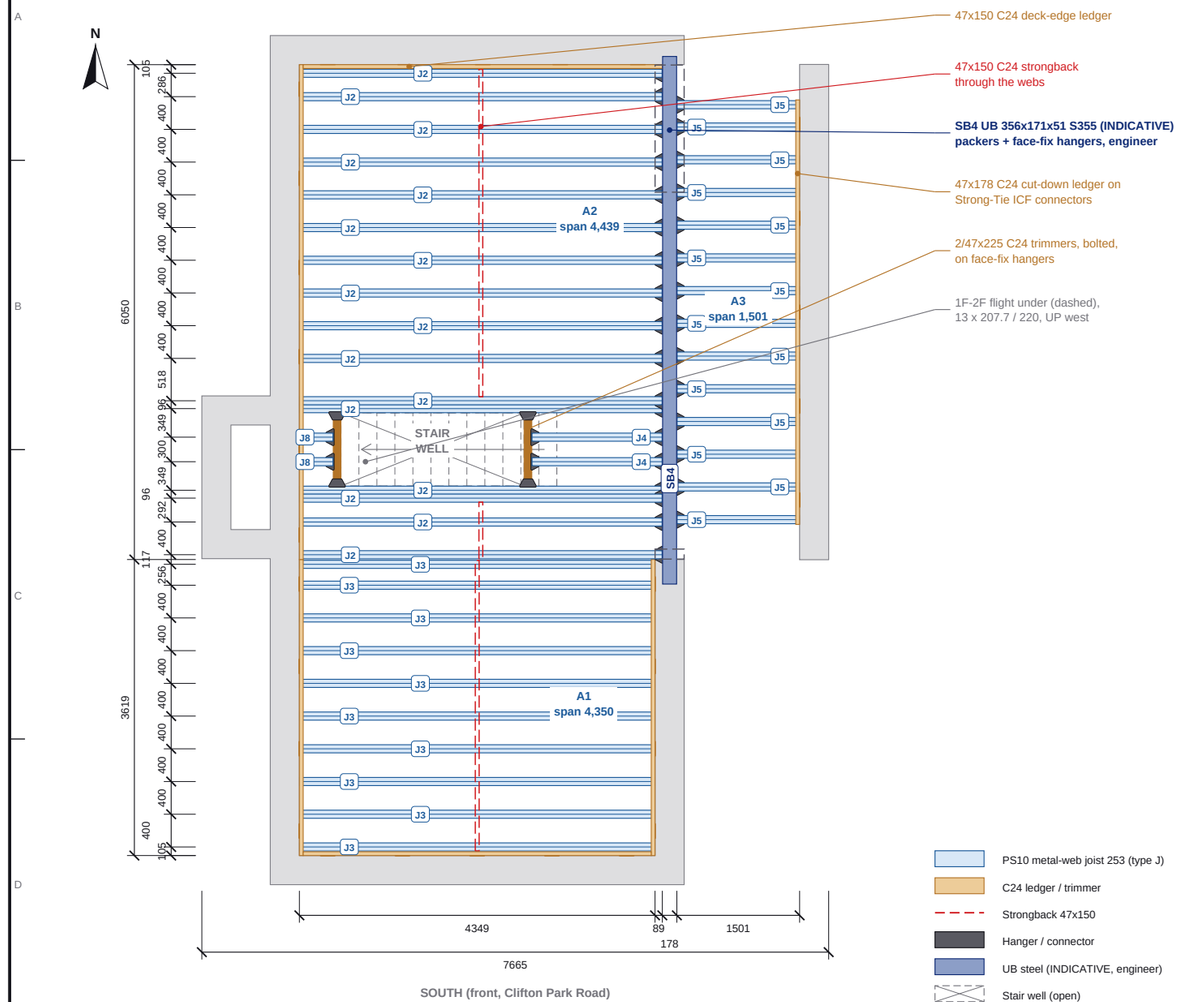


SOUTH (front, Clifton Park Road)

SECOND FLOOR JOIST LAYOUT

Scale 1:75 @ A3 | Plan on the joists, deck omitted; ICF cut at +5,650

0 1 2 3 4 5m

PS10 metal-web joist 253 (type J)
C24 ledger / trimmer
Strongback 47x150
Hanger / connector
UB steel (INDICATIVE, engineer)
Stair well (open)
ICF walls (cut)
ICF walls over (where different)

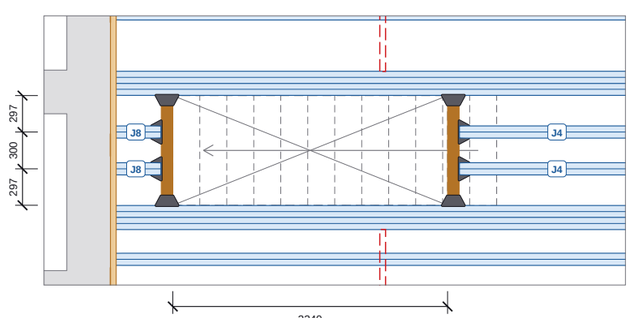

STAIR WELL FRAMING - ENLARGED

Scale 1:50 | trimmers, trimming pairs, trimmed joists

SECOND FLOOR SCHEDULES

JOIST SCHEDULE (PS10 253 DEEP, @400)

Type	O/A	Bottom	Bearing	Bays	Qty
J2	4,433	4,386	ICF ledger / steel packer (incl. 4 dbl)	A2	16
J3	4,344	4,250	ICF ledger both ends	A1	10
J4	1,590	1,590	trimmed: hung off trimmer	A2	2
J5	1,495	1,448	steel packer / ICF ledger	A3	14
J8	408	361	trimmed: hung off trimmer	A2	2
	Total				**44**

O/A = top chord overall, Bottom = bottom chord. Includes 4 No. in doubled (bolted) trimming pairs. Types J1-J8 common to both floors.

LEDGERS, STRONGBACKS, TRIMMERS (C24)

Item	Length	Qty	Run m
2 No. 47x225 trimmer, bolted	894	2	1.8
47x150 deck-edge ledger	4,256-4,392	2	8.6
47x150 strongback	692-4,003	3	8.2
47x178 ledger cut-down	3,620-6,050	4	18.5

METALWORK AND DECK

Item	Qty
Top-chord restraint clip (galv)	52
Strong-Tie ICFVL-CW + ICFLC ICF connector	29
Face-fix hanger on timber packer in UB web	32
Face-fix trimmer hanger	4
Face-fix joist hanger off trimmer	4
22 Egger Protect P5 T&G board	57 (48.4 m2)

2F STEELS (INDICATIVE - ENGINEER)

Mark	Section	Line	Length	kg
SB4	UB 356x171x51 S355	y 4,979	6,450	329
	Total (indicative)			**329**

NOTES

1. Second floor FFL +5,800: 44 No. PS10 metal-web joists 253 deep (97x47 flanges) @400 E-W in bays A1-A3. ICF ends TOP-HUNG on 47x178 C24 cut-down ledgers on cast-in Strong-Tie ICFVL-CW + ICFLC connectors; SB4 ends on face-fix hangers to timber packers bolted in the UB web.
2. Ledger top +5,731, joist top +5,778, 22 Egger Protect P5 T&G deck, 47x150 C24 strongbacks at mid-span, 47x150 deck-edge ledgers, galv restraint clips at every top-hung bearing.
3. STAIR WELL 2,240 x 894 over the 1F-2F flight (13 x 207.7 / 220, headroom 2,217): doubled trimming pairs, 2/47x225 C24 trimmers on face-fix hangers, trimmed joists hung off them.
4. SB4 UB 356x171x51 S355 INDICATIVE (329 kg, top +5,943.6) under the 2F main right wall line - engineer to design sections, bearings, padstones, pockets and connections.
5. 2F rooms sit under the 50 deg roof: 2F partitions are NOT modelled (raked heads under the rafters - BOQ assumption, see ES26-065-TF-03). Roof structure over on ES26-065-RF-01. Joist supplier to design; pricing only.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Clifton College Garage Site, Clifton Park Road, Bristol

DRAWING TITLE

SECOND FLOOR STRUCTURE

PS10 joists, ledgers, hangers, strongbacks, stair well trimming, SB4

SCALE	SIZE	DATE
AS SHOWN	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-065-FL-03	-

Do not scale. All dimensions in mm. Check all dimensions on site.