
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. ENGLAND - Building Regulations. Ridge ~10.1 m, below 11 m. Floors, steels, stairs, roofs, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

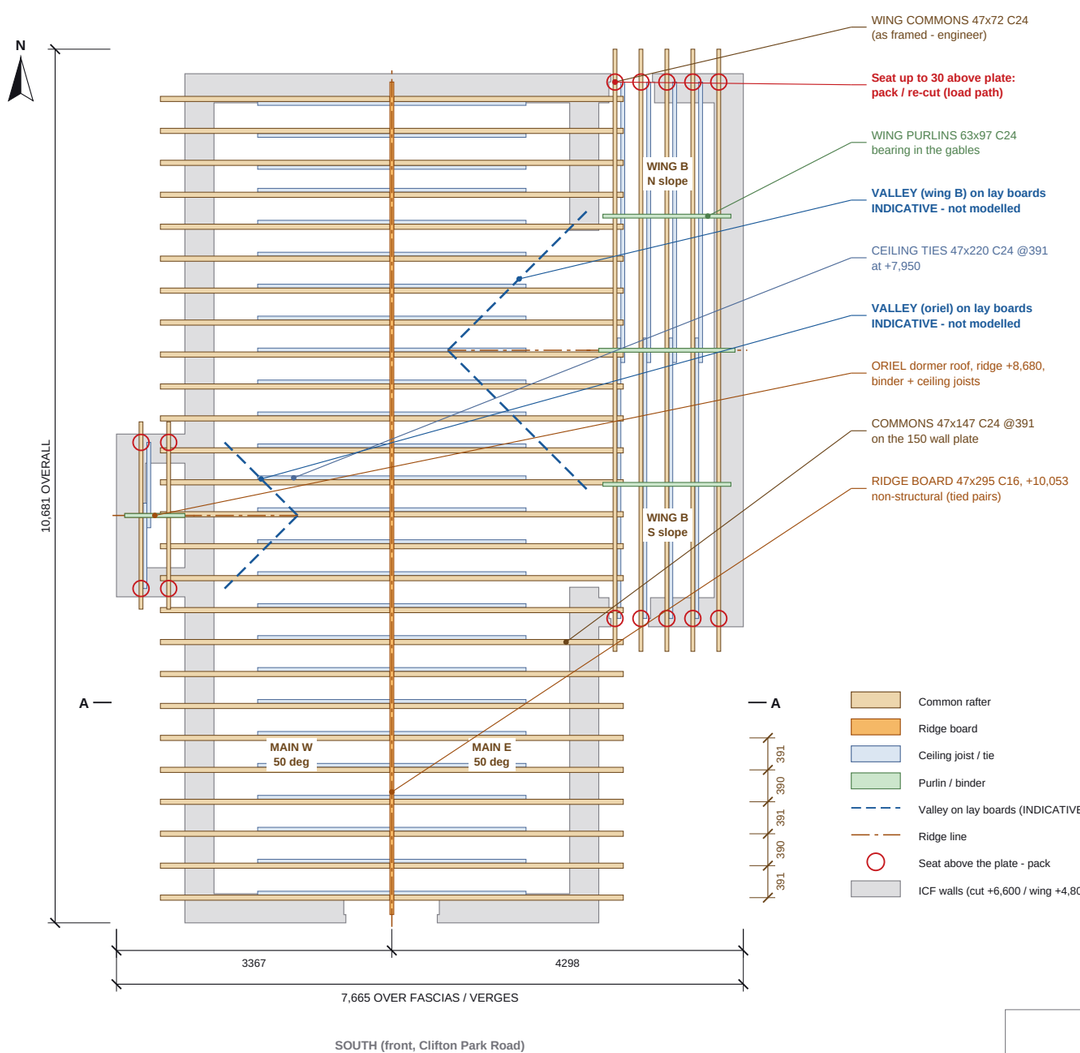


SOUTH (front, Clifton Park Road)

ROOF STRUCTURE PLAN

Scale 1:75 @ A3 | on the rafters, tiles / battens / membrane omitted

0 1 2 3 4 5m

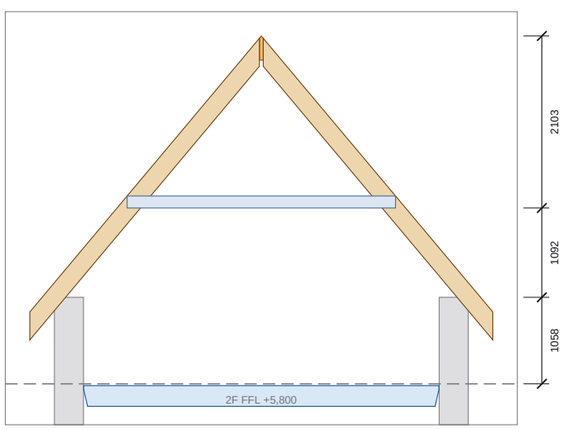

SECTION A-A (MAIN ROOF)

Scale 1:75 | at y 2,790, looking north

ROOF STRUCTURE SCHEDULES

ROOF MEMBER SCHEDULE

Member	Section	Length	Qty	Run m
Main (79 members, 52 clips)				
Ridge board	47x295 C16	10,178	1	10.2
Common rafter	63x220 C24	4,403	52	229.0
Raised tie / collar (ceiling +7,950)	47x147 C24	3,282	26	85.3
Wing B (22 members, 10 clips)				
Ridge board	47x147 C16	1,666	1	1.7
Purlin	47x147 C24	1,666	2	3.3
Binder	47x122 C24	1,666	1	1.7
Common rafter	47x72 C24	5,726	10	57.3
Ceiling joist / tie	47x147 C24	3,429	8	27.4
Oriel (8 members, 4 clips)				
Ridge board	47x147 C16	735	1	0.7
Binder	47x72 C24	735	1	0.7
Common rafter	47x72 C24	1,781	4	7.1
Ceiling joist / tie	47x72 C24	1,043	2	2.1
Total members			**109**	

Lengths = cut lengths from the model (min-max where they vary). Valley lay boards / valley boards not modelled - allow on site.

VALLEYS (LAY-BOARD, INDICATIVE)

Pop-out	No.	Plan	True
Wing B	2	2,467	3,226
Oriel	2	1,263	1,652

Valley line lengths each, from the roof planes (same 50 deg pitch).

NOTES

1. Cut roofs as modelled for the quotation (TLS roof framer), 50 deg, clay double Roman tiles (per the elevations; design load as interlocking tiles). MAIN roof between the front + rear ICF PARAPET gables (raked from +7,200, coping by others): 47x147 C24 commons @391 each side on the 150 wall plate (eaves ICF top +6,858), plumb-cut to a 47x295 ridge board (ridge +10,053); 47x220 C24 ceiling ties @391 at +7,950.
2. WING B cross gable (eaves +5,029, ridge +9,237) and ORIEL dormer roof (ridge +8,680): commons to a ridge board, purlins 63x97 bearing in the gables (wing), ceiling joists hung off a binder. Both are POP-OUTS carried over the main slope.
3. VALLEYS (dashed): the pop-out roofs are framed over the main rafters on LAY BOARDS + valley boards - INDICATIVE, not modelled member by member; the roofer / engineer to detail.
4. LOAD PATH: 14 rafter seats on the wing + oriel sit up to 30 mm above the plate (planes' heel vs rafter depth) - pack the seats or re-cut the birdsmouths (rings). Wing / oriel rafter sizes (47x72) as framed - ENGINEER to confirm all sizes.
5. MAIN ROOF: RAISED TIES / collars at +7,950 (2,150 above the 2F FFL, under h/3 of the rise) = the flat collar ceiling of the 2F rooms in the roof; sloping ceilings on the rafters below - ENGINEER to confirm.
6. INDICATIVE - ENGLAND: snow / wind to the engineer. TCP clips at every seat. Levels above GF FFL, mm.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Clifton College Garage Site, Clifton Park Road, Bristol

DRAWING TITLE

ROOF STRUCTURE

Main roof, wing B cross gable, oriel dormer, valleys (indicative)

SCALE	SIZE	DATE
AS SHOWN	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-065-RF-01	-

Do not scale. All dimensions in mm. Check all dimensions on site.