
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. ENGLAND - Building Regulations. Ridge ~10.1 m, below 11 m. Floors, steels, stairs, roofs, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

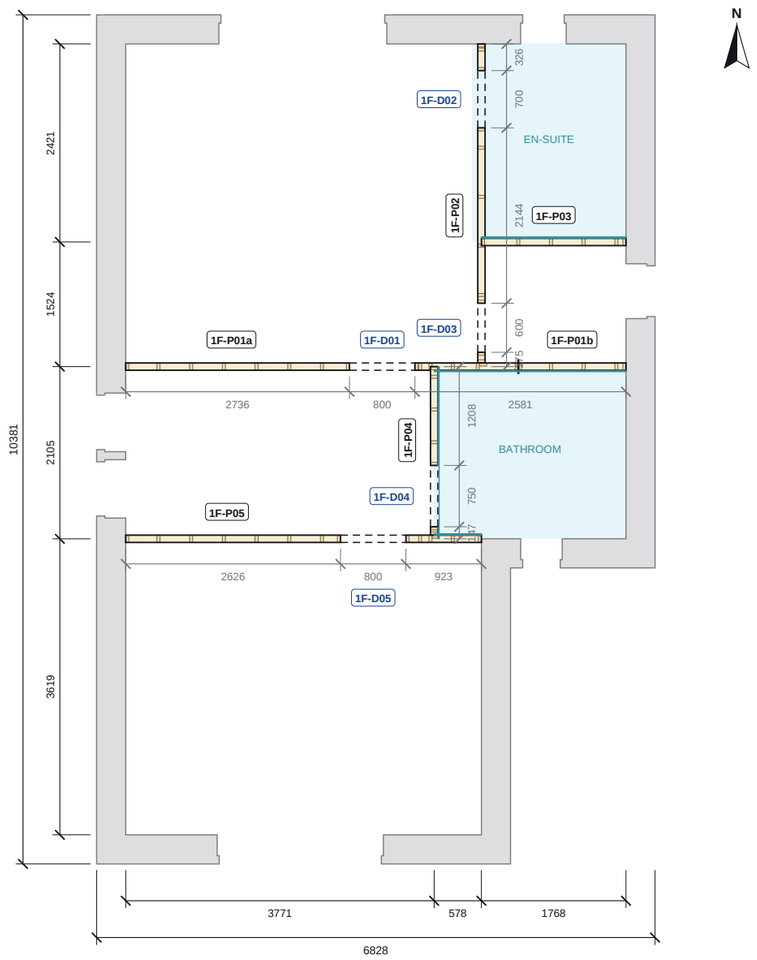

SOUTH (front, Clifton Park Road)

FIRST FLOOR TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | plan cut at 1,200 above 1F FFL

0 1 2 3 4 5m

Partition panel 38x89 C16
Stud cut at plan level
Panel joint
Door opening, head over
18 WBP pattress (wet face)
Wet room
Nudura ICF (context only)

FIRST FLOOR SCHEDULES

PARTITION SCHEDULE

Wall	Panels	Length	Studs	Use	Head	Doors
1F-P01	IN2/IN3	6,117	38x89 C16 @400	wet room	5,520	1F-D01
1F-P02	IN5	3,945	38x89 C16 @600	partition	5,520	1F-D03, 1F-D02
1F-P03	IN6	1,768	38x89 C16 @400	wet room	5,520	-
1F-P04	IN4	2,105	38x89 C16 @400	wet room	5,520	1F-D04
1F-P05	IN1	4,350	38x89 C16 @400	wet room	5,520	1F-D05
		18,285				**5 doors**

Panels = TLSTF panel names (IN..). Head = top of frame above GF FFL (z 0). Length along the wall (mm).

DOOR OPENING SCHEDULE

Door	Wall	Width	Height	Lvs	Note
1F-D01	1F-P01	800	2,100	1	bed 1
1F-D02	1F-P02	700	2,100	1	en-suite
1F-D03	1F-P02	600	2,100	1	cpd
1F-D04	1F-P04	750	2,100	1	bathroom
1F-D05	1F-P05	800	2,100	1	bed 2

Structural opening sizes. Height = underside of the head rail above FFL.

PARTITION TIMBER (1F)

Member	Pieces	Run m
38x89 C16 studs (incl. king / junction)	78	145.0
38x89 C16 rails (head, sole, door head)	22	36.4
38x89 C16 noggins	45	12.7
Total 38x89 C16 (4.8 m lengths)	**43**	**194.1**

From the model (TLSTF members). 4.8 m lengths = run x 1.05 / 4.8, not cut-optimised.

HEAD CLIPS, NOGGINS, PATTRESS

Wall	Clips	Nogg.	Runs vs joists over
1F-P01	12	0	under a joist chord
1F-P02	10	0	across the joists
1F-P03	4	0	under a joist chord
1F-P04	8	0	across the joists
1F-P05	9	9	parallel - noggins between
Pattress 18 WBP	34		1F-P01 14, 1F-P03 10, 1F-P04 6

NOTES

1. Non-load-bearing partitions (TLSTF): 38x89 C16 studs @600 (@400 wet-room walls), rails + noggins, 15 plasterboard each side, insulation in the bays. By others - coordination only.
2. Heads stop 5 short of the 2F PS10 joist underside (+5,525; frame top +5,520), fixed with galv slotted deflection head clips to the joist bottom chords (43 No.) and 38x89 noggins between the chords where a partition runs parallel (9 No.) - clip product to CONFIRM. Floor over on ES26-065-FL-03.
3. Base = 1F FFL +3,100: sole plates fixed down at <= 600 c/c through the 22 Egger deck into the PS10 top chords / noggins. Set-out to partition centre lines; check on site.
4. Wet rooms (en-suite, bathroom): 18 WBP ply pattress in the stud bays on the wet-room face, 150-1,950 above the floor (34 pieces) for sanitaryware / wall-hung fixings.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Clifton College Garage Site, Clifton Park Road, Bristol

DRAWING TITLE

FIRST FLOOR TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE
AS SHOWN	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-065-TF-02	-

Do not scale. All dimensions in mm. Check all dimensions on site.