
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation only. ENGLAND - Building Regulations. Ridge ~10.1 m, below 11 m. Floors, steels, stairs, roofs, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION



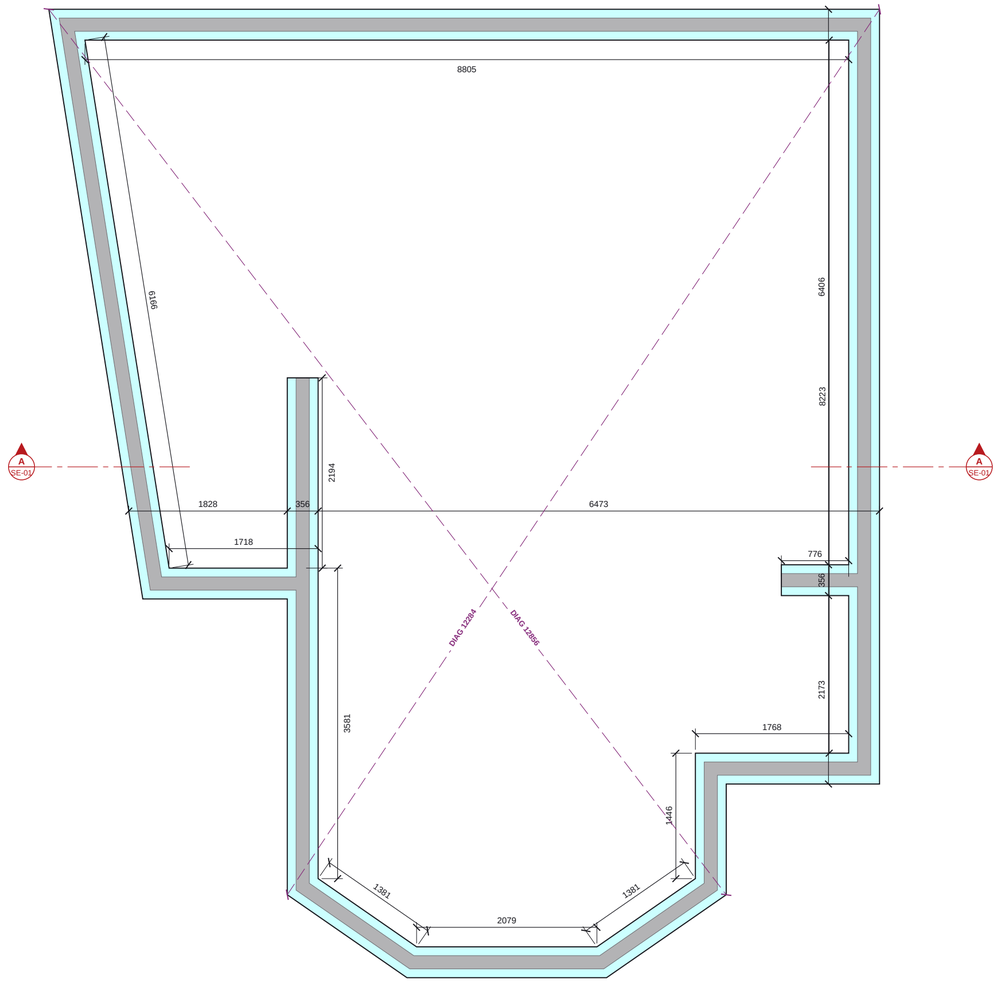

EPS insulation (Nudura form)

Concrete core

End cap at opening

Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters

Setting-out check diagonal (external ICF corners)

Section line (see SE sheet)

FOOTING ICF PLAN

Scale 1:50 @ A2 | Plan cut at -457

0 1 2 3m

FOOTING ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design yet (planning drawings). ICF per the quotation model: 6in XR35 throughout with the Nudura Brick Ledge on the foundation course (natural stone outer leaf), 2-course foundation on a strip footing (by others), internal load-bearing walls in ICF, front / rear parapet gables and the wing gable raked to the 50 degree roof, the oriel on an RC corbel. Floor steels, corbel, roof and stairs indicative - engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Cuckfield Real Estate Ltd	Clifton College Garage Site, Clifton Park Road, Bristol

DRAWING TITLE

FOOTING ICF GENERAL ARRANGEMENT

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:50	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-065-GA-01	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.